Interactive Flat Panel Display

TA-65/TA-75/TA-86



UHD Resolution

8GB RAM
128GB ROM

40 touch points

Android 15

Zero bonding

Share screen

USB Type-C

8 arrays

Split screen

Remote control

Copyright © 2009-2026 TACTEASY TECHNOLOGY CO., LTD All Rights Reserved.

Display			
Size	65inch	75inch	86inch
Type	DLED		
Aspect ratio	16:9		
Screen display size (mm)	1428*803	1646*925.5	1892*1064
Physical resolution	3840 × 2160 (4k)		
Display color	10bit/1.07 Billion		
Refresh rate	60Hz		
Brightness	≥350cd/㎡	≥350cd/㎡	≥400cd/㎡
Contrast	4000:1		
Response time	6ms		
Viewing angle	178°/ 178°		
Display protection	Anti-glare 4mm full tempered high explosion-proof glass		
Backlight life	50000 hours		
System			
CPU	Octa-Core CPU A76x4 2.4GHz + A55x4 1.8GHz		
System version	Android 15		
RAM	8GB		
ROM	128GB		
Operating temperature	0℃-40℃		
INTERACTIVITY			
Touch Technology	IR		
Touch points	40 points		
Positioning Accuracy	1mm		
Drive Mode	No driver required		
Writing method	Fingers, touch pens or other non-transparent objects not less than 5mm in diameter		
Palm erase	Yes		
Communication Port	USB 3.0		
Reaction time (Single touch)	＜4ms		
Touch resolution	32768 x 32768		
Times of touches	Unlimited time in theoretical		
Transfer speed	12Mb/s		

Copyright © 2009-2026 TACTEASY TECHNOLOGY CO., LTD All Rights Reserved.

Compatibility	Support windows, Android, Mac OS, Linux

Connectivity

Back port	
HDMI IN	X1
HDMI OUT	x1
RJ45 IN	x1
Touch USB	X1
RS232	X1
SPDIF OUT	X1
USB 3.0	X1
USB 2.0	X1
Type-C OUT	X1
TF CARD	X1
MIC IN	X1
Earphone	X1
WIFI	Support IEEE 802.11 a/b/g/n/ac/ax
OPS SLOT	X1
Front port	
HDMI IN	X1
USB-A 3.0	X3
USB TOUCH	x1
USB-C	x1

Dimension

Overall dimensions (mm, L×W×T)	1485*105*905	1708*105*1026.5	1954*105*1165
Net weight	37.7kg	51.5kg	67.2kg
Gross weight	46.5kg	64.6kg	85.2kg
Packaging size (mm, L×W×T)	1600*205*1001.5	1846*215*1180	2092*215*1319
VESA	500x400	600x400	800x400

Power Supply

Consumption rate	≤190W	≤270W	≤320W

Copyright © 2009-2026 TACTEASY TECHNOLOGY CO., LTD All Rights Reserved.


Standby power	≤1W
Voltage range	AC100-240V~50/60Hz
Speaker specification	2 x 15 Watts
Operating temperature	32℉-104℉ (0℃-40℃)
Storage temperature	-4℉-140℉ (-20℃-60℃)
Humidity	5%-80% relative humidity, non-condensing

Accessories


Power cable	x1
Remote control	x1
Wall mount	x1
HDMI &Touch USB cable	x1
Whiteboard pen	x2

Dimensions


65”

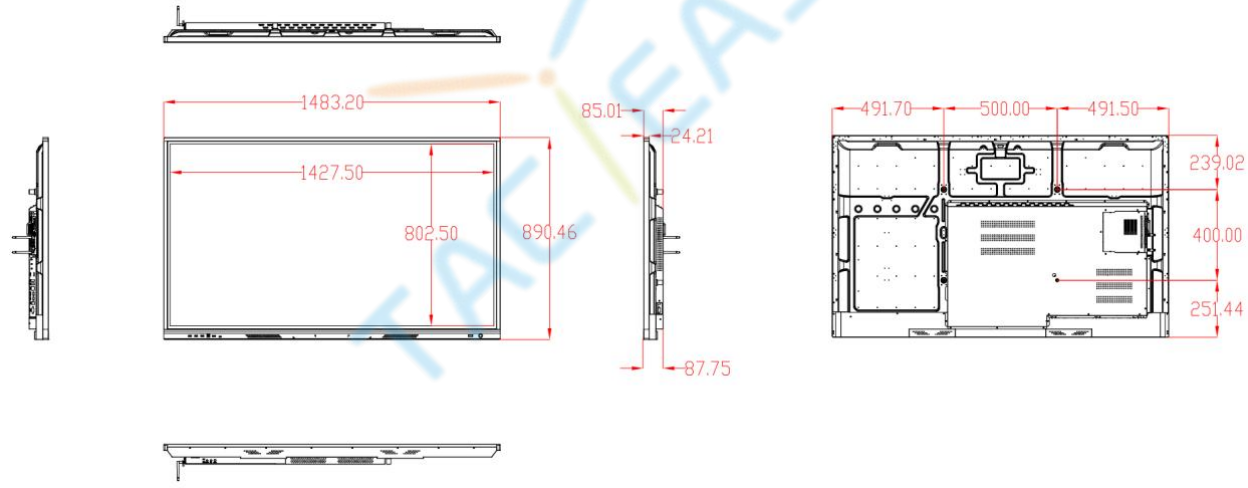

75”

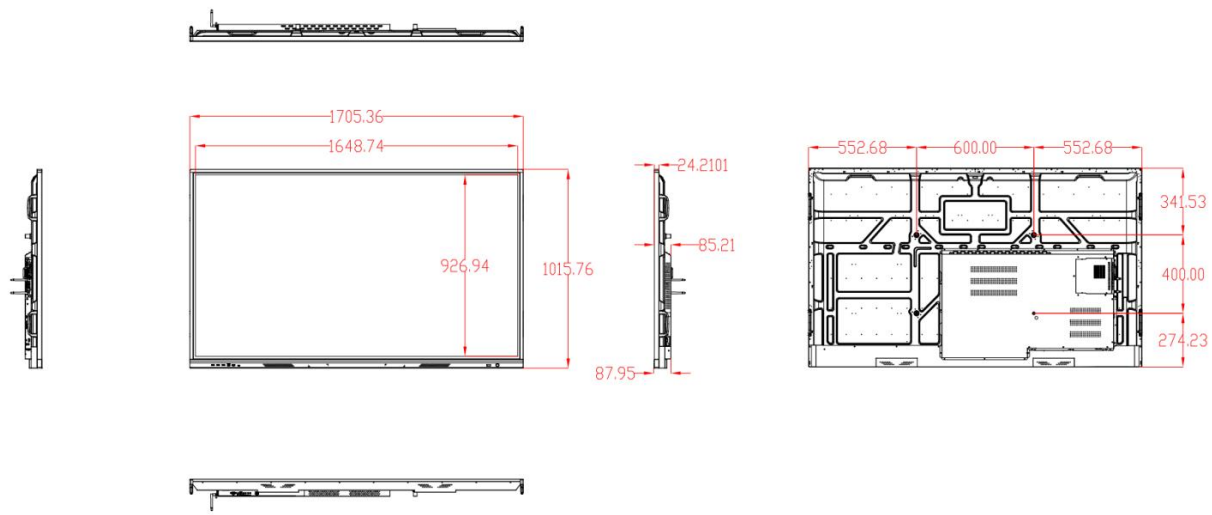

Copyright © 2009-2026 TACTEASY TECHNOLOGY CO., LTD All Rights Reserved.

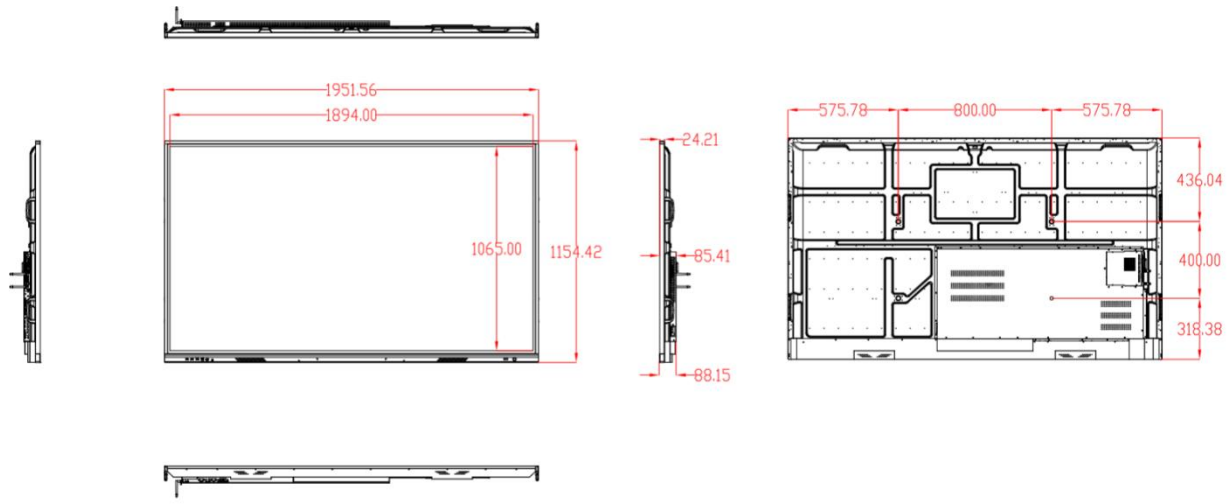86’’	

TACTEASY TECHNOLOGY CO., LTD
www.tacteasy.com
1004-1005, Building C, Longhua Digital Innovation Center, Shenzhen, China
market@tacteasy.com

Copyright © 2009-2026 TACTEASY TECHNOLOGY CO., LTD All Rights Reserved.