


TA-75 TOUCH PANEL

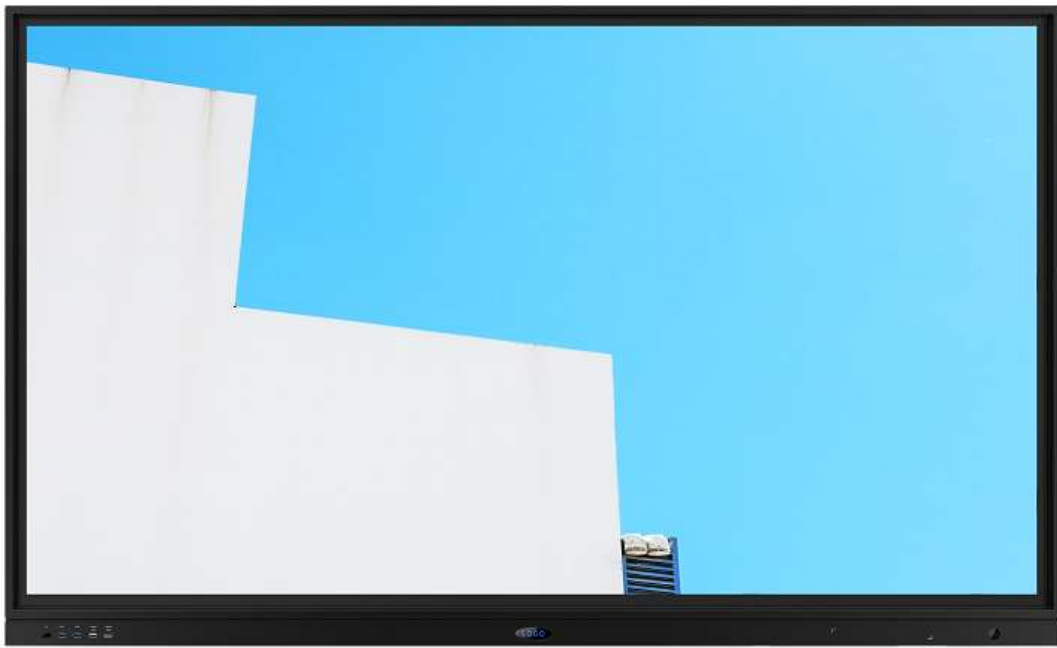

Multitouch

UHD
3840x2160

4K Resolution



Dual system



Google Play



Narrow frame



EClass Software



50000hrs



Anti-glare



LinkGo Software



ECO

TOUCH ALL IN ONE PC, FOR MEETING

1. Screen characteristic

Appearance	Ultra-narrow aluminum alloy face frame design, anti-glare tempered glass
Overall dimensions	1707.4 x 1038.3 x 96mm
Consumption rate	≤320W(not including ops)
Standby power	≤1W
Voltage range	AC100-240V~50/60Hz
Net weight	64kg
VESA	600 x400 mm

2. System parameters

Android system	
CPU	Dual-core A73 and dual-core A53 1.5GHZ
System version	Android 8.0 Embedded Systems
RAM	4G
ROM	32G
External storage	SD card maximum expansion to 128G
Back Input interface	1* DP
	1*AV
	1*VGA
	1*PC Audio
	2*HDMI
	2*HDMI TOUCH
	1*Component (YPbPr)
	1*USB FL(3.0)
	1*USB2.0
	1*VGA&DP TOUCH
	1*RJ45
1*RS232	

TOUCH ALL IN ONE PC, FOR MEETING

	1*TF(SD card)
Back Output interface	1*HDMI
	1*COAX(SPDIF)
	1*Earphone
	1*RJ45/LAN
Front input interface	2*USB3.0
	1*HDMI
	1*TOUCH USB
Front button	1*Power
	1*Home
	1*source (same as input select)
	1*Volume +
	1*Volume -
OPS interface	Support, 4K@60H、30HZ
Ambient light sensor	Support
WLAN	2.4Ghz & 5Ghz
Wireless transmission screen	Yes
Speaker specifications	15W / 8Ω× 2 bass effect speaker
Windows system(Optional)	
CPU	Intel Coir i5
RAM	8G
SSD	128G
System version	Test version Windows 10

3. Display parameters

Display size	75inch (16*9)
Display type	DLED
Screen display size	1650.24(H) x928.26(V) (mm)
Physical resolution	3840×2160
Display color	1.07 Billion
Refresh rate	60HZ
Brightness	≥400 cd/m ²
Contrast	4000: 1 (Typ.)
Response time	6ms
Viewing angle	178°
Display protection	4mm full tempered high explosion-proof glass
Backlight life	50000 hours
Bluetooth	Suport

4. Touch parameters

Touch sensing technology	Infrared sensing positioning recognition touch technology, HID free drive
Writing method	Fingers, touch pens or other non-transparent objects not less than 5mm in diameter, support 20 point finger touch
Positioning accuracy	More than 90% of the touch area is ≤1mm
Reaction time	<6ms
Communication Interface	Type A USB Male, Support USB 2.0 (FULL SPEED) HID Compliant (Plug & Play)Touch PC Interface
Touch resolution	32768*32768
Times of touches	Unlimited time in theoretical
Touch point	20 points

TOUCH ALL IN ONE PC, FOR MEETING

transfer speed	12Mb/s
Driver	Automatic system identification, free drive
Operating system	Support windows, Android, Mac OS, Linux
Operating temperature	0°C-40°C

5. Accessories

Power cable	1pc
Remote control	1pc
Wall mount	1pc
HDMI & Touch USB wire	1pcs
Whiteboard pen	2pcs