Interactive Flat Panel Display

TA-65

UHD Resolution

8GB RAM
128GB ROM

40 touch points

Android 14

Zero bonding

Share screen

USB Type-C

8 array

Split screen

Remote control

Copyright © 2012-2026 SINOEVIEW TECHNOLOGY CO., LTD All Rights Reserved.

Display

Size	65inch
Type	DLED
Aspect ratio	16:9
Screen display size (mm)	1431*806
Physical resolution	3840 × 2160 (4k)
Display color	10bit/1.07 Billion
Refresh rate	60Hz
Brightness	≥400cd/㎡
Contrast	4000:1
Response time	6ms
Viewing angle	178°/ 178°
Display protection	4mm full tempered high explosion-proof glass
Backlight life	50000 hours

System

CPU	Octa-core Cortex-A55 1.5GHZ
System version	Android 14
RAM	8GB
ROM	128GB

OPS Spec

Chipset	I5-10TH
RAM	8G
ROM	256G SSD
OS	Windows10/ Windows11 (Unactivated))

INTERACTIVITY

Touch Technology	IR
Touch points	40 points
Positioning Accuracy	1mm
Drive Mode	Drive Mode
Writing method	Fingers, touch pens or other non-transparent objects not less than 5mm in diameter
Palm erase	Yes
Communication Port	USB 2.0
Reaction time (Single touch)	＜6ms
Touch resolution	32768 x 32768
Times of touches	Unlimited time in theoretical
Transfer speed	12Mb/s
Compatibility	Support windows, Android, Mac OS, Linux

Connectivity

Back port	
HDMI out	x1

Copyright © 2012-2026 SINOEVIEW TECHNOLOGY CO., LTD All Rights Reserved.

HDMI in	X2
VGA in	x1
Audio	x1
COAX(SPDIF)	x1
Earphone	x1
Mic	x1
TF card	x1
USB 3.0	x1
USB 2.0	x1
RS232	x1
Touch out	x1
LAN	X2
AV in	x1
YPBPR	x1
WIFI	Wifi 6, support 100Mpbs
Front port	
HDMI IN	x1
USB Touch	x1
USB-A 3.0	x3
Type-C	x1
Configuration	
Bluetooth Version	5.2

Dimension

Overall dimensions (mm, L×W×T)	1492*892*78
Net weight	32Kg
Gross weight	38Kg
Packaging size (mm, L×W×T)	1605*1010*195
VESA	500*400

Power Supply

Consumption rate	≤160W
Standby power	≤1W
Voltage range	AC100-240V~50/60Hz
Speaker specification	2 x 15 watts
Operating temperature	32℉-104℉ (0℃-40℃)
Storage temperature	-4℉-140℉ (-20℃-60℃)
Humidity	5%-80% relative humidity, non-condensing

Accessories

Power cable	x1
Remote control	x1
Wall mount	x1
HDMI &Touch USB cable	x1
Whiteboard pen	x2

Copyright © 2012-2026 SINOEVIEW TECHNOLOGY CO., LTD All Rights Reserved.

Built-camera and mic parameter

Microphones	8 integrated microphones
Pickup distance	10m
Sample rate	Sampling frequency 48K Hz; sampling number 24bit
Features	Full duplex, echo cancellation, noise suppression
Camera resolution	Support 1080P
Camera	48 Megapixels, top x 1
Camera lens angle	120°

Dimensions

65”

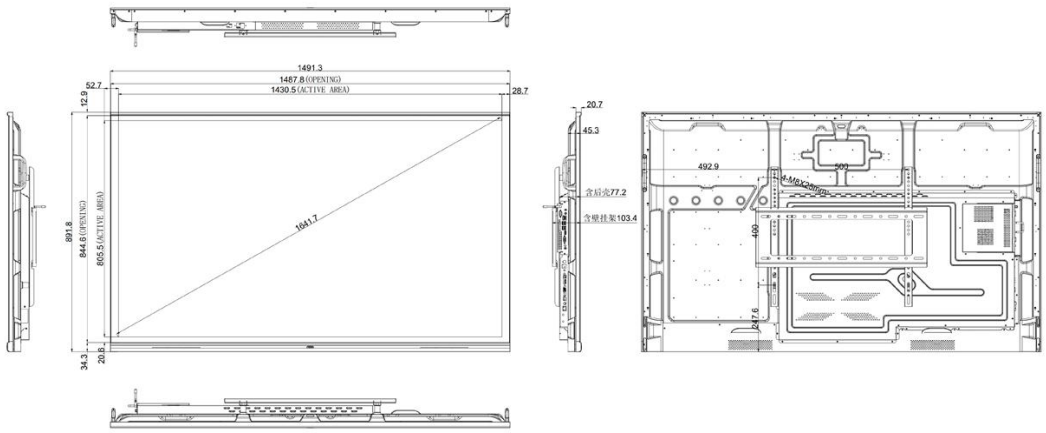

2012-2026 SINOEVIEW TECHNOLOGY CO., LTD
201, F2, Building A, Qiaoan Technology Park, No. 308 Wuhe Road,
Guanlan Street, Longhua district, Shenzhen
Officemarket@sinoeview.com

Copyright © 2012-2026 SINOEVIEW TECHNOLOGY CO., LTD All Rights Reserved.