Interactive Flat Panel Display

TA-65/TA-86/TA-98



UHD Resolution

16GB RAM
256GB ROM

40 touch points

Android 16.0

Zero bonding

Share screen

USB Type-C

8 arrays

Split screen

Remote control

Copyright © 2009-2026 TACTEASY TECHNOLOGY CO., LTD All Rights Reserved.

Display			
Size	65inch	86inch	98inch
Type	DLED		
Aspect ratio	16:9		
Screen display size (mm)	1427.5*802.5	1895.00*1065.00	2160.8*1216.4
Physical resolution	3840 × 2160 (4k)		
Display color	10bit/1.07 Billion		
Refresh rate	60Hz		
Brightness	≥400cd/㎡	≥400cd/㎡	≥450cd/㎡
Contrast	5000:1		
Response time	5ms		
Viewing angle	178°/ 178°		
Display protection	Anti-glare 4mm full tempered high explosion-proof glass；hardness ≥ 7H		
Backlight life	50000 hours		
Display Bezel	Black/White		
Android System			
CPU	quad-core Cortex-A72 + quad-core Cortex-A53		
System version	Android 16.0		
RAM	16GB		
ROM	256GB		
Windows System			
CPU	i7-14th		
System version	Windows system		
RAM	16G		
ROM	512G		
Interactivity			
Touch technology	IR (infrared touch)		
Touch points	40 points		
Positioning accuracy	1mm		
Drive mode	Drive Mode		
Writing method	Fingers, touch pens or other non-transparent objects not less than 5mm in diameter		

Copyright © 2009-2026 TACTEASY TECHNOLOGY CO., LTD All Rights Reserved.

Palm erase	Yes
Communication port	USB 3.0
Reaction time (Single touch)	＜5ms
Touch resolution	32768 x 32768
Times of touches	Unlimited time in theoretical
Transfer speed	12Mb/s
Compatibility	Support windows, Android, Mac OS, Linux

Connectivity

Back port	
HDMI IN	x1
HDMI OUT	x1
RJ45 IN	x1
COAX(SPDIF)	x1
RS232	x1
EARPHONE	x1
USB2.0 (Type-A）	X2
USB2.0 (Type-C）	x1
MIC IN	x1
TF CARD	x1
TP USB	x1
TOUCH USB	x1
OPS SLOT	x1
Front port	
HDMI IN	X1
USB TOUCH	x1
USB-A 3.0	X3
USB-C	x1
Other configurations	
WIFI	WIFI 6, Support 802.11 b/g/n/ac/ax
Bluetooth	Built-in Bluetooth 5.0/5.2
UPS	Built in(Optional)

Built-camera & Mic parameter(optional)

Copyright © 2009-2026 TACTEASY TECHNOLOGY CO., LTD All Rights Reserved.

Microphones	8 integrated microphones
Pickup distance	12m
Sample rate	Sampling frequency 48K Hz; sampling number 24bit
Features	Full duplex, echo cancellation, noise suppression
Camera resolution	Support 4k
Camera	48 Megapixels, top x 1, AI function;Auto Framing
Camera lens angle	120°

Dimension & Weight

Overall dimensions (mm)	1485*104*910.3	1953.4*104*1174.7	2217.6*1321.1*96
Net weight	37.7kg	67.2kg	82kg
Gross weight	46.5kg	85.2kg	106kg
Packaging size (mm)	1600*205*1001.5	2092*215*1319	2355*1445*225
VESA	500x400	800x400	900*600

Power Supply

Consumption rate	≤190W	≤270W	≤320W
Standby power	≤1W		
Voltage range	AC100-240V~50/60Hz		
Speaker specification	2 x 15 Watts		
Operating temperature	32℉-104℉ (0℃-40℃)		
Storage temperature	-4℉-140℉ (-20℃-60℃)		
Humidity	5%-80% relative humidity, non-condensing		


Accessories

Power cable	x1
Remote control	x1
Wall mount	x1
HDMI &Touch USB cable	x1
Whiteboard pen	x2
Installation	The supplier shall be responsible for the complete integration, testing, and commissioning of all audiovisual (AV) equipment supplied, prior to its dispatch from the factory.


Copyright © 2009-2026 TACTEASY TECHNOLOGY CO., LTD All Rights Reserved.

Dimension Diagram



65”

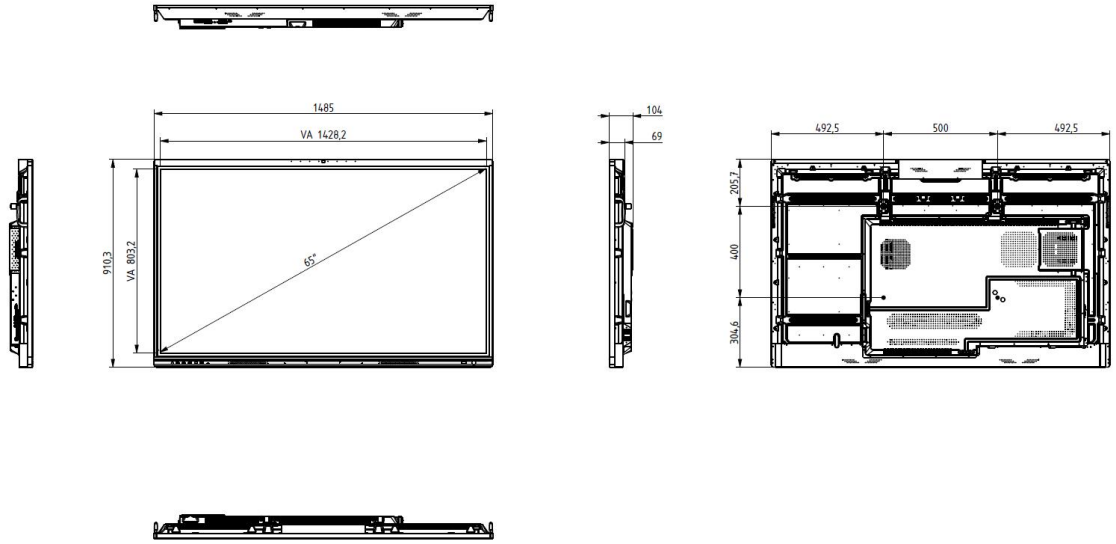

86”

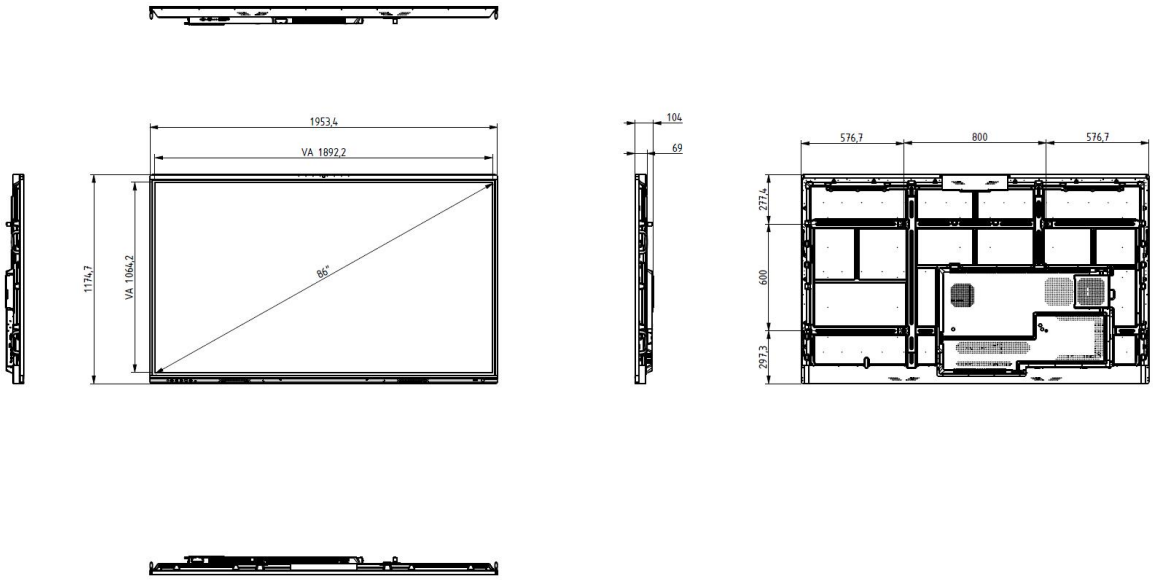

Copyright © 2009-2026 TACTEASY TECHNOLOGY CO., LTD All Rights Reserved.

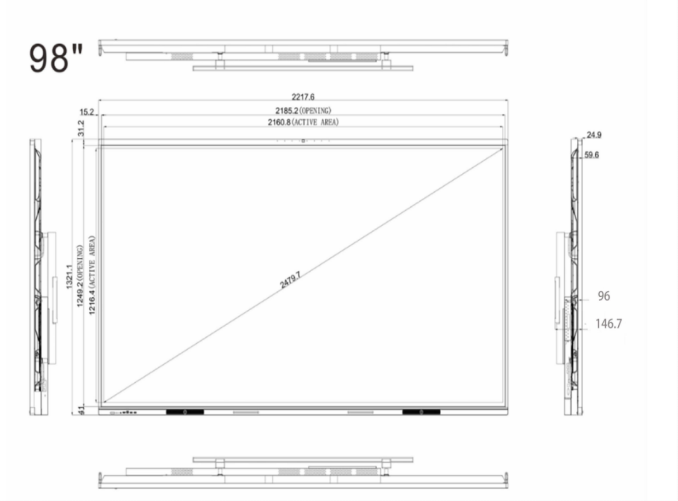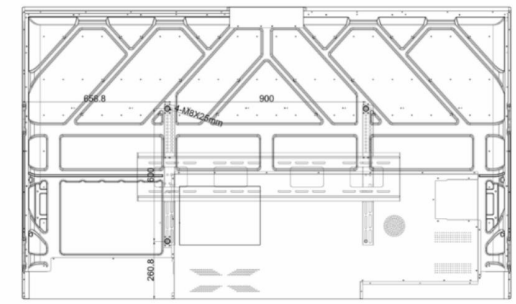98’’	 

TACTEASY TECHNOLOGY CO., LTD
www.tacteasy.com
1004-1005, Building C, Longhua Digital Innovation Center, Shenzhen, China
market@tacteasy.com

Copyright © 2009-2026 TACTEASY TECHNOLOGY CO., LTD All Rights Reserved.